

Product data sheet

Specifications



Ethernet network TCP/IP module, Modicon Quantum, transparent ready, 750mA at 5VDC

140NOE77101

! Discontinued - Service only

! Discontinued on: Dec 31, 2018

! To be end-of-service on: Dec 31, 2026

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Modicon Quantum automation platform
Product or Component Type	Ethernet network TCP/IP module
Concept	Transparent Ready
Web server	Class B30
Web services	Diagnostics via predefined web pages Rack viewer Data Editor (via PC terminal)
Communication Service	SNMP network management Bandwidth management Global Data I/O scanning Modbus TCP messaging FDR server
Communication Port Protocol	Ethernet Modbus TCP/IP
Physical interface	MT/RJ - 100BASE-FX fiber optic RJ45 - 10BASE-T/100BASE-TX twisted pair
Transmission Rate	10/100 Mbit/s

Complementary

Redundancy	Yes hot standby redundant architecture
Supply	Via the power supply of the rack
Marking	CE
Local signalling	for 10 Mbps or 100 Mbps data rate (10 MB/100 MB) 1 LED for collision detection (Coll) 1 LED for download mode (Kernel) 1 LED for Ethernet module fault (Fault) 1 LED for Ethernet network status (RUN) 1 LED for full-duplex mode (Fduplex) 1 LED for module ready (Ready) 1 LED for network active (Link) 1 LED for rack operational (Active) 1 LED for transmission/reception activity (TxAct/RxAct) 1 LED
Current consumption	750 mA 5 V DC
Module format	Standard
Net Weight	0.761 lb(US) (0.345 kg)

Environment

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

IP Degree of Protection	IP20
Product Certifications	cUL UL 508
Standards	CSA C22.2 No 142 FM Class 1 Division 2
Resistance to electrostatic discharge	4 kV contact IEC 801-2 8 kV on air IEC 801-2
Resistance to electromagnetic fields	9.1 V/m (10 V/m) 80...1000 MHz IEC 801-3
Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Relative Humidity	95 % without condensation
Operating altitude	<= 14763.78 ft (4500 m)

Ordering and shipping details

Category	US1BMS180230
Discount Schedule	BMS1
GTIN	3595862052887
Returnability	No
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.97 in (5.0 cm)
Package 1 Width	6.69 in (17.0 cm)
Package 1 Length	12.40 in (31.5 cm)
Package 1 Weight	19.8 oz (560.0 g)

Contractual warranty

Warranty	18 months
----------	-----------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better



Materials and Substances


[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

Dimensions Drawings

Racks for Modules Mounting

Dimensions of Modules and Racks

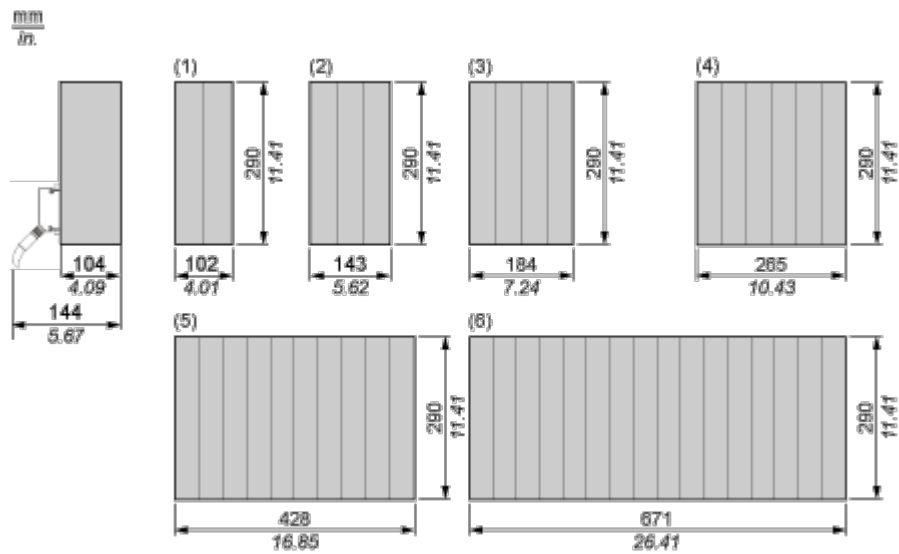

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots