



Main

Range of product	Automation platform Product or
Product or component type	DIO drop interface

Complementary

Number of port	1 single
[Us] rated supply voltage	115/230 V AC
Supply voltage limits	85...276 V
Supply frequency	47...63 Hz
Supply current	0.2 A 115 V 0.4 A 230 V
Inrush current	10 A 115 V 20 A 230 V
Rated power in VA	50 VA
Associated fuse rating	1.5 A
Output voltage	5.1 V
Nominal output current	3 A
Load current	≥ 0 A
Short-circuit protection	With
Output overvoltage protection	With
I/O words	30 I/32 O
Typical backplanes	2 positions 3 positions 4 positions 6 positions 10 positions 16 positions
Diagnostics startup	Checksum RAM RAM address
Diagnostics run time	Checksum


	RAM RAM address
Power dissipation in W	11 W
Connections - terminals	Terminal block, 7 poles
Module format	Standard

Environment

Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m
Protective treatment	TC
Standards	UL 508
Product certifications	CSA Class 1 Division 2 C-Tick DNV GOST UL

Racks for Modules Mounting


Dimensions of Modules and Racks

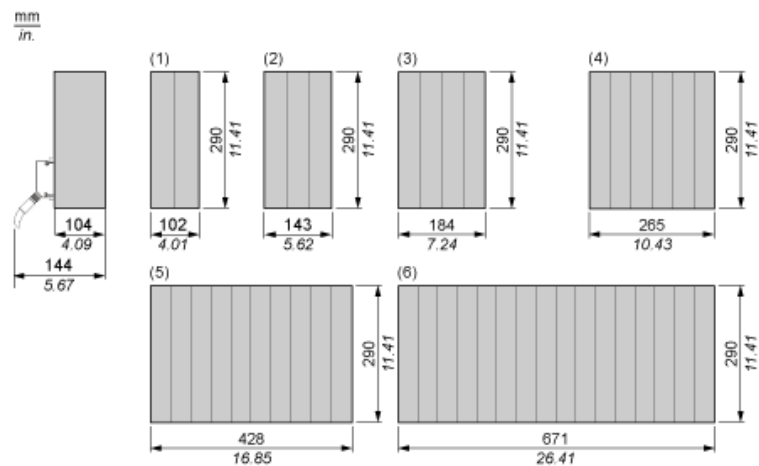

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

AC Powered Distributed I/O (DIO) Module

Wiring Diagram

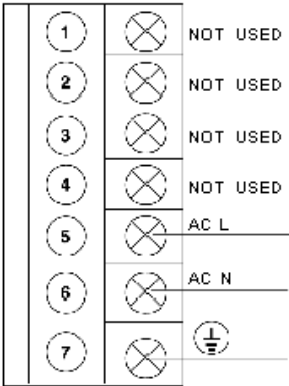

140CRA21110 is replaced by:



Standard environment BMXCRA31200

Modicon X80 RIO Drop E/IP STD

Qty 1

Reason for Substitution: End of life | Substitution date: 31 December 2021 | Not same dimensions/design/
software, complete reconfiguration needed - EtherNet/IP drop, no more Modbus Plus