

DATA SHEET

vibro-meter®

TQ402/TQ412, EA402 and IQS900 proximity measurement system





TQ412 (reverse mount)

(€ €x IECEx ® KGS UK [] [x PESO

KEY FEATURES AND BENEFITS

- From the vibro-meter[®] product line
- Non-contact measurement system based on eddy-current principle
- Ex certified versions for use in hazardous areas (potentially explosive atmospheres)
- Conforms to API 670 recommendations
- 1, 5 and 10 m systems
- Temperature-compensated design
- Voltage or current output with protection against short circuits
- Frequency response:
 DC to 20 kHz (-3 dB)
- Measurement range:2 or 4 mm
- Temperature range:
 -40 to +180 °C

APPLICATIONS

- Shaft relative vibration and gap/position measurement chains for machinery protection and/or condition monitoring
- Ideal for use with VM600^{Mk2}/VM600 and VibroSmart[®] machinery monitoring systems
- API 670 applications

DESCRIPTION

The TQ402/TQ412, EA402 and IQS900 form a proximity measurement system, from Meggitt's vibro-meter[®] product line. This proximity measurement system allows contactless measurement of the relative displacement of moving machine elements.

TQ4xx-based proximity measurement systems are particularly suitable for measuring the relative vibration and axial position of rotating machine shafts, such as those found in steam, gas and hydraulic turbines, as well as in alternators, turbocompressors and pumps.



Information contained in this document may be subject to export control regulations of the European Union, USA or other countries. Each recipient of this document is responsible for ensuring that transfer or use of any information contained in this document complies with all relevant export control regulations. ECN N/A.



DESCRIPTION (continued)

The system is based around a TQ402 or TQ412 non-contact sensor and an IQS900 signal conditioner. Together, these form a calibrated proximity measurement system in which each component is interchangeable. The system outputs a voltage or a current proportional to the distance between the transducer tip and the target, such as a machine shaft.

The active part of the transducer is a coil of wire that is moulded inside the tip of the device, made of Torlon[®] (polyamide-imide). The transducer body is made of stainless steel. The target material must, in all cases, be metallic.

The transducer body is available with metric or imperial thread. The TQ412 version is intended for reverse-mount applications. Both the TQ402 and TQ412 have an integral coaxial cable, terminated with a self-locking miniature coaxial connector. Various cable lengths (integral and extension) can be ordered.

The IQS900 signal conditioner contains a high-frequency modulator/demodulator that supplies a driving signal to the transducer. This generates the necessary electromagnetic field used to measure the gap. The conditioner circuitry is made of high-quality components and is mounted in a painted aluminium housing.

Note: The IQS900 signal conditioner matches or betters the outstanding measurement performance and specifications of the IQS450 signal conditioner, which it replaces. Accordingly, the IQS900 is compatible with all TQ9xx and TQ4xx proximity sensors / measurement chains.

In addition, the IQS900 signal conditioner includes improvements such as: SIL 2 "by design", improved frame-voltage immunity, improved electromagnetic immunity and emissions, smaller output impedance (voltage output), optional diagnostic circuitry (that is, built-in self-test (BIST)), raw output pin, test input pin, new DIN-rail mounting adaptor and removable screw-terminal connectors for easier installation.

The TQ402 and TQ412 transducers can be matched with a single EA402 extension cable to effectively lengthen the front-end. Optional housings, junction boxes and interconnection protectors are available for the mechanical and environmental protection of the connection between the integral and extension cables.

TQ4xx-based proximity measurement systems can be powered by associated machinery monitoring systems such as VM600^{Mk2}/VM600 modules (cards) or VibroSmart[®] modules, or by another power supply.

For specific applications, contact your local Meggitt representative.

SPECIFICATIONS

Overall proximity measurement system

Operation

Sensitivity

Ordering option B21
Ordering option B22
Ordering option B23
Ordering option B23
Ordering option B24
1.25 µA/µm (31.2 µA/mil)
1.25 µA/µm (31.2 µA/mil)

Linear measurement range (typical)

Ordering option B21
Ordering option B22
Ordering option B23
Ordering option B23
Ordering option B23
Ordering option B24
Ondering option B24
Onderin

Linearity : See Performance curves on page 8 and on page 9

Frequency response : DC to 20 kHz (-3 dB)

Interchangeability of elements : All components in system are interchangeable



Environmental

Potentially explosive atmospheres

Available in Ex approved versions for use in hazardous locations – TQ402/TQ412 and EA402

Type of protection Ex i: intrinsic safety (ordering option A2)				
Europe	EC type examination certificate	(Ex) 1G (Zones 0, 1, 2) LCIE 11 ATEX 3091 X Ex ia C T6T3 Ga		
International	IECEx certificate of conformity	IECEx LCI 11.0061X Ex ia IIC T6T3 Ga		
North America	cCSAus certificate of compliance	CCSAus 1514309 Class I, Divisions 1 and 2, Groups A, B, C, D Ex ia		
South Korea	KGS certificate of conformity	KGS 15-GA4BO-0664X Ex ia IIC T6 to T3		
Russian Federation	EAЭC RU certificate of conformity	EAЭC RU C-CH.AД07.B.03003/21 0Ex ia IIC T6T3 Ga X		
India	PESO approval certificate*	PESO A/P/HQ/WB/104/5575 (P447944) Ex ia IIC T6T3 Ga		

Type of protection Ex nA: non-sparking (ordering option A3)				
Europe	Voluntary type examination certificate	(E) 3G (Zone 2) LCIE 11 ATEX 1010 X Ex nA T6T3 Gc		
International	IECEx certificate of conformity	IECEx LCI 11.0063X Ex nA II T6T3 Gc		
North America	cCSAus certificate of compliance	CCSAus 1514309 Class I, Division 2, Groups A, B, C, D		
Russian Federation	EAGC RU certificate of conformity*	EAЭC RU C-CH.AД07.B.03003/21 2Ex nA II T6T3 Gc X		

^{*}Not engraved/marked on the products.



For specific parameters of the mode of protection concerned and special conditions for safe use, refer to the Ex certificates that are available from Meggitt SA.



For the most recent information on the Ex certifications that are applicable to this product, refer to the Ex product register (PL-1511) document that is available from Meggitt SA.



Available in Ex approved versions for use in hazardous areas – IQS9xx (ordering option code A5)

Protection mode	IQ\$9xx			
Europe				
ec (Gas)	(x) II 3 G (Zone 2) Ex ec IIC T6 or T5 Gc LCIE 21 ATEX 1004 X T6: For −40°C ≤ T _{amb} ≤ +70°C T5: For −40°C ≤ T _{amb} ≤ +85°C			
ia (Gas)	(x) II 1 G (Zones 0, 1, 2) Ex ia IIC T6 or T5 Ga LCIE 21 ATEX 3002 X T6: For −40°C ≤ T _{amb} ≤ +70°C T5: For −40°C ≤ T _{amb} ≤ +85°C			
ia (Dust)	Ex II 1 D (Zones 20, 21, 22) Ex ia IIIC T_{200} 80°C T_{200} 115°C Da LCIE 21 ATEX 3002 X T_{200} 80°C: For -40°C $\leq T_{amb} \leq +50$ °C T_{200} 95°C: For -40°C $\leq T_{amb} \leq +65$ °C T_{200} 115°C: For -40°C $\leq T_{amb} \leq +85$ °C			

International			
ec (Gas)	Ex ec IIC T6 or T5 Gc IECEx LCIE 21.0005X T6: For -40° C \leq T _{amb} \leq +70 $^{\circ}$ C T5: For -40° C \leq T _{amb} \leq +85 $^{\circ}$ C		
ia (Gas)	Ex ia IIC T6 or T5 Ga IECEx LCIE 21.0006X T6: For -40°C ≤ T _{amb} ≤ +70°C T5: For -40°C ≤ T _{amb} ≤ +85°C		
ia (Dust)	Ex ia IIIC T_{200} 80°C T_{200} 115°C Da IECEx LCIE 21.0006X T_{200} 80°C: For -40 °C $\leq T_{amb} \leq +50$ °C T_{200} 95°C: For -40 °C $\leq T_{amb} \leq +65$ °C T_{200} 115°C: For -40 °C $\leq T_{amb} \leq +85$ °C		



IQS9xx				
North America				
Class I, Division 2, Groups A, B, C, D T6T5 Ex ec IIC T6T5 Gc				
CCSAus 80084516				
IS Class I, Division 1, Groups A, B, C, D T6 or T5 Ex ia IIC T6 or T5 Ga Class I, Zone 0, AEx ia IIC T6 or T5 Ga				
CCSAus 80084516				
Class II, Division 1, Groups E, F, G T80°CT115°C Ex ia IIIC T80°CT115°C Da				
Zone 20, AEx ia IIIC T80°CT115°C Da cCSAus 80084516				
	North America Class I, Division 2, Groups A, B, C, D T6T5 Ex ec IIC T6T5 Gc Class I, Zone 2, AEx ec IIC T6T5 Gc cCSAus 80084516 IS Class I, Division 1, Groups A, B, C, D T6 or T5 Ex ia IIC T6 or T5 Ga Class I, Zone 0, AEx ia IIC T6 or T5 Ga cCSAus 80084516 Class II, Division 1, Groups E, F, G T80°CT115°C Ex ia IIIC T80°CT115°C Da Zone 20, AEx ia IIIC T80°CT115°C Da			

South Korea			
ec (Gas)	Ex ec IIC T6T5 Gc KGS 21-GA4BO-0355X T6: For -40° C \leq T _{amb} \leq +70 $^{\circ}$ C T5: For -40° C \leq T _{amb} \leq +85 $^{\circ}$ C		
ia (Gas)	Ex ia IIC T6 or T5 Ga KGS 21-GA4BO-0353X T6: For -40° C \leq T _{amb} \leq +70 $^{\circ}$ C T5: For -40° C \leq T _{amb} \leq +85 $^{\circ}$ C		
ia (Dust)	Ex ia IIIC T_{200} 80°C T_{200} 115°C Da KGS 21-GA4BO-0352X T_{200} 80°C: For -40 °C $\leq T_{amb} \leq +50$ °C T_{200} 95°C: For -40 °C $\leq T_{amb} \leq +65$ °C T_{200} 115°C: For -40 °C $\leq T_{amb} \leq +85$ °C		

ec (Gas) Ex ec IIC T6 or T5 Gc CML 21 UKEX 4549 X T6: For -40°C ≤ T _{amb} ≤ +70°C	
T5: For -40° C \leq T _{amb} \leq +85 $^{\circ}$ C	
ia (Gas) Il 1 G (Zones 0, 1, 2) Ex ia C T6 or T5 Ga CML 21 UKEX 2548 X T6: For -40°C ≤ T _{amb} ≤ +70°C T5: For -40°C ≤ T _{amb} ≤ +85°C	
$(\underbrace{x}) \text{ II 1 D (Zones 20, 21, 22)}$ $\text{Ex ia IIIC } T_{200} 80^{\circ}\text{C} T_{200} 115^{\circ}\text{C Da}$ $\text{ia } \qquad \text{CML 21 UKEX 2548 X}$ $(\text{Dust}) \qquad \qquad T_{200} 80^{\circ}\text{C: For } -40^{\circ}\text{C} \leq T_{\text{amb}} \leq +50^{\circ}\text{C}$ $T_{200} 95^{\circ}\text{C: For } -40^{\circ}\text{C} \leq T_{\text{amb}} \leq +65^{\circ}\text{C}$ $T_{200} 115^{\circ}\text{C: For } -40^{\circ}\text{C} \leq T_{\text{amb}} \leq +85^{\circ}\text{C}$	



Protection mode	IQS9xx		
Russian Federation			
ec (Gas)	2Ex e IIC T6T5 Gc X EAЭC RU C-CH.A Δ 07.B.03744/21 T6: For -40° C \leq T _{amb} \leq +70 $^{\circ}$ C T5: For -40° C \leq T _{amb} \leq +85 $^{\circ}$ C		
ia (Gas)	0Ex ia IIC T6T5 Ga X EA \ni C RU C-CH.A \Diamond 07.B.03744/21 T6: For -40° C \le T _{amb} \le +70 $^{\circ}$ C T5: For -40° C \le T _{amb} \le +85 $^{\circ}$ C		
ia (Dust)	Ex ia IIIC T_{200} 80°C T_{200} 115°C Da X EAЭC RU C-CH.A Δ 07.B.03744/21 T_{200} 80°C: For -40°C $\leq T_{amb} \leq +50$ °C T_{200} 95°C: For -40°C $\leq T_{amb} \leq +65$ °C T_{200} 115°C: For -40°C $\leq T_{amb} \leq +85$ °C		

 \triangle

For specific parameters of the mode of protection concerned and special conditions for safe use, refer to the Ex certificates that are available from Meggitt SA.



For an IQS9xx signal conditioner with protection mode "Ex ec" located in an Ex Zone 2, the user must ensure that the IQS9xx is installed in an industrial housing or enclosure that ensures a protection rating of at least IP54 (or equivalent).



For the most recent information on the Ex certifications that are applicable to this product, refer to the Ex product register (PL-1511) document that is available from Meggitt SA.

Approvals

Conformity : European Union (EU) declaration of conformity (CE marking).

EAC marking, Eurasian Customs Union (EACU) certificate/

declaration of conformity.

Electromagnetic compatibility

• TQ402/TQ412 and EA402 : EN 61000-6-2:2005.

EN 61000-6-4:2007 + A1:2011.

TR CU 020/2011.

• IQS900 : EN 61000-6-2:2005.

EN 61000-6-4:2007 + A1:2011.

EN 61326-1:2013. EN 61326-3-2:2008 (SIL).

Electrical safety : EN 61010-1:2010

Environmental management : RoHS compliant (2011/65/EU)

Hazardous areas : Ex approved versions

(see Potentially explosive atmospheres starting on page 3)

Russian federal agency for technical regulation and metrology (Rosstandart)

: Pattern approval certificate No 60859-15

Enabling the Extraordinary

To Fly To Power To Live



SPECIFICATIONS (continued)

System calibration

Calibration temperature : +23°C ±5°C

Target material : VCL 140 steel (1.7225)

Note: For applications using a non-standard or special target material, performance curves can be generated and supplied. Contact Meggitt SA for further information.

Total system length

The total system length (TSL) is the sum of the length of the TQ4xx transducer's integral cable and the length of the EA40x extension cable. The supported TSLs can be obtained from different combinations of cables.

Total system lengths

1 m
 5 m
 1.0 m integral cable with no extension cable
 5 m
 0.5 m integral cable + 4.5 m extension cable

1.0 m integral cable + 4.0 m extension cable.
1.5 m integral cable + 3.5 m extension cable.
2.0 m integral cable + 3.0 m extension cable.
5.0 m integral cable with no extension cable.
0.5 m integral cable + 9.5 m extension cable.

• 10 m : 0.5 m integral cable + 9.5 m extension cable.

1.0 m integral cable + 9.0 m extension cable.
1.5 m integral cable + 8.5 m extension cable.
2.0 m integral cable + 8.0 m extension cable.
5.0 m integral cable + 5.0 m extension cable.
10.0 m integral cable with no extension cable.

Note: The combination of cables selected for a particular total system length depends on the application. For example, to obtain the optimum location for the separation between the integral and extension cables or to eliminate the requirement for an extension cable.


Total system length trimming

Due to the characteristics of the coaxial cable, an "electrical trimming" of the nominal length of extension cables is necessary to optimize the system performance and the transducer interchangeability.

TSL for a 1 m measurement chain : 0.9 m minimum
TSL for a 5 m measurement chain : 4.4 m minimum
TSL for a 10 m measurement chain : 8.8 m minimum



Performance curves for TQ402 or TQ412 with IQS900 – 2 mm measurement range

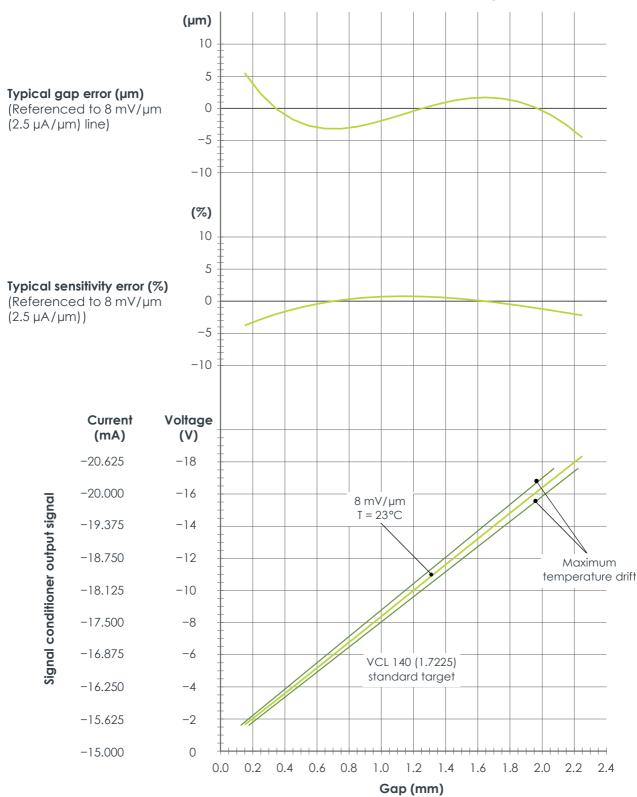

Proximity transducer: TQ402 or TQ412


Signal conditioner: IQS900 (ordering option code B21 or B22)

Standard target material: VCL 140 (1.7225)

Equivalent materials: A 37.11 (1.0065), AFNOR 40 CD4, AISI 4140



Performance curves for TQ402 or TQ412 with IQS900 – 4 mm measurement range

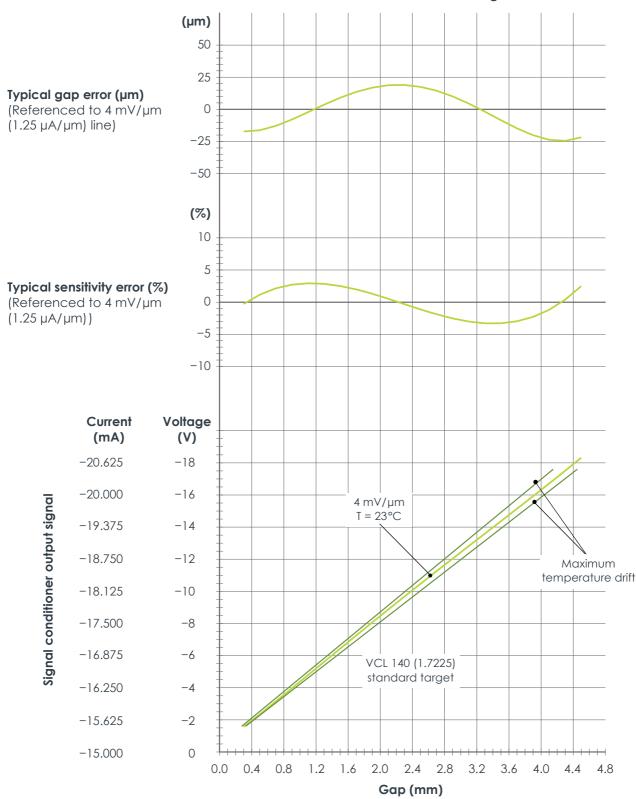

Proximity transducer: TQ402 or TQ412

Signal conditioner: IQS900 (ordering option code B23 or B24)

Standard target material: VCL 140 (1.7225)

Equivalent materials: A 37.11 (1.0065), AFNOR 40 CD4, AISI 4140



TQ402 and TQ412 proximity transducers and EA402 extension cable

General

Transducer input requirements : High-frequency power source from an IQS900 signal conditioner

Environmental

Temperature ranges

• Transducer : -40 to +180°C with drift <5% (operating).

+180 to +220°C with drift >5% (short-term survival).

• Transducer and cable : -40 to +195°C if used in an Ex Zone

 Cable, connector and optional : -40 to +200°C

protection

Protection rating

(according to IEC 60529)

Vibration (according to IEC 60068-2-26)

Shock acceleration

(according to IEC 60068-2-27)

: The head of the proximity transducer (transducer tip and integral cable) is rated IP68

: 5 g peak between 10 and 500 Hz

: 15 g peak (half sine-wave, 11 ms duration)

Physical characteristics

Transducer construction : Wire coil Ø8 mm, Torlon (polyamide-imide) tip, encapsulated in

stainless steel body (AISI 316L) with high-temperature epoxy glue

Integral and extension cables : FEP covered 70 Ω coaxial cable, Ø3.6 mm Connectors

: Self-locking miniature coaxial connectors.

Note: When connecting, these should be hand-tightened until

locked.

Optional protection

• Flexible stainless steel hose (protection tube)

• FEP sheath (extruded fluorinated ethylene propylene)

: The stainless steel hose provides additional mechanical protection but is not leak-tight

: The FEP sheath provides resistance to almost all chemicals and low permeability to liquids, gases and moisture. It is also flexible, low friction and mechanically tough.



IQS900 signal conditioner

Current output (2-wire signal transmission)

Current at min. / max. gap : -15.5 mA / -20.5 mA

Measurement range : 5 mA (corresponding to 2 or 4 mm)

Output sensitivity : See Operation on page 2 and IQS900 signal conditioner on

page 17

Nominal output signal

• Without diagnostics : -15.5 to -20.5 mA

• With diagnostics : -15.5 to -20.5 mA indicates normal operation.

Other current values (>-15.5 or <-20.5 mA) indicate a problem

with the measurement chain (sensor, cabling and/or

signal conditioner).

Output impedance : >60 k Ω .

Note: Recommended monitoring system input impedance: \leq 350 Ω .

Voltage output (3-wire signal transmission)

Voltage at min. / max. gap : -1.6 V / -17.6 V

Measurement range : 16 V (corresponding to 2 or 4 mm)

Output sensitivity : See Operation on page 2 and IQS900 signal conditioner on

page 17

Nominal output signal

• Without diagnostics : -1.6 t o -17.6 V

• With diagnostics : -1.6 to -17.6 V indicates normal operation.

Other current values (>-1.6 or <-17.6 V) indicate a problem with

the measurement chain (sensor, cabling and/or

signal conditioner).

Output impedance : $<100 \Omega$ at DC. (small signal) $<300 \Omega$ at 20 kHz.

Note: Recommended monitoring system input impedance: $\geq 50 \text{ k}\Omega$. The low output impedance enables operation with a wider range

of galvanic separation units / safety barriers, without loss of performance. For example, an IQS900 (output impedance 100Ω) connected to a third-party galvanic isolator (input impedance $10 k\Omega$) will see 1% max. signal loss due to impedance matching.

Protection : Short-circuit (35 mA), overvoltage (-33 V_{DC} typical)

Output voltage swing : -0.05 to -22.5 V with a 50 k Ω load and a -24 V_{DC} power supply.

-0.05 to -21.5 V with a 10 k Ω load and a -24 V_{DC} power supply.

Raw output (RAW/COM)

Output voltage range : -0.8 to -8.8 V (nominal) Output impedance : <15 k Ω up to 20 kHz.

 $< 10 \text{ k}\Omega$ for DC measurement.

Note: Recommended test equipment input impedance: >1 $M\Omega$.

Protection : Short-circuit, overvoltage (-33 V_{DC} typical)

Test input (TEST/COM)

Input voltage range : ± 0.1 to 4.0 V_{PK-PK} (nominal), depending on the measured gap (DC)

Input impedance : $500 \text{ k}\Omega$.

Note: Recommended test equipment output impedance: $>5 \text{ k}\Omega$.

Protection : Overvoltage (-33 V_{DC} typical)



Power supply (to IQS900)

Input voltage range

 With a current output signal : -18 to -30 V_{DC} (nominal)

(2-wire signal transmission)

 With a voltage output signal : -19 to -30 V_{DC} (nominal)

(3-wire signal transmission)

Current consumption : 25 mA max.

(with nominal 24 V_{DC} supply)

Overvoltage protection (diode) : -33 V_{DC} typical

Note: The IQS900 should be powered (energised) using a limited-power, low-voltage power supply such as a sensor power supply output provided a VM600^{Mk2}/VM600 or VibroSmart[®] monitoring and/or protection system, a GSI127 galvanic separation unit or other suitable power supply.

In safety-related applications, an IQS900 must be powered using a limited-power, low-voltage power supply with a safe limitation of $-30 \, V_{DC}$ (nominal), even in the event of a single fault with the power supply.

Environmental

Temperature

• Operating and storage : -40 to 85°C (-40 to 185°F)

Humidity : 0 to 95%, non-condensing

Protection rating : IP20.

(according to IEC 60529) Note: The IQS900 is suitable for indoor use only unless it is installed in

an industrial housing or enclosure that ensures a higher level of

environmental protection.

Flammability : UI 94 V-0

Vibration : 5 g peak between 10 and 500 Hz

(according to IEC 60068-2-6)

Shock acceleration : 15 g peak (half sine-wave, 11 ms duration)

(according to IEC 60068-2-27)

Connectors

Self-locking miniature coaxial : 1 contact for sensor-side signal:

connector (bidirectional) sensor (connects to TQ9xx sensor or EA902 cable)

Screw-terminal connector (input) : 4 contacts for test signals: raw output (RAW/COM) and

test input (TEST/COM)

Screw-terminal connector (output) : 4 contacts for monitor-side signals:

measurement output (O/P/COM) and

power supply input (-24V/COM)

Screw-terminal connectors

 $: 0.2 \text{ to } 1.5 \text{ mm}^2 \text{ (24 to 16 AWG)}$ • Clamping range (min. to max.) • Tightening torque (min. to max.) : 0.2 to 0.25 N·m (0.15 to 0.18 lb-ft)

Note: The IQS900 features removal screw-terminal connectors that can unplugged from the main body of its housing to simplify installation and mounting.

Enabling the Extraordinary

To Fly To Power To Live



SPECIFICATIONS (continued)

Physical characteristics

Electrical connections


Housing material Dimensions Weight Mounting


- Without DIN-rail mounting adaptor
- With DIN-rail mounting adaptor (ordering option code G2)
- : Self-locking miniature coaxial connector and removable screwterminal connectors (see **Connectors on page 12**)
- : Injection-moulded aluminium, painted
- : See Mechanical drawings and ordering information on page 17
- : 200 g (0.44 lb) approx.
- : Two M4 screws
- : MA130 DIN-rail mounting adaptor for IPC707 and IQS900 signal conditioners.
 - Suitable for TH 35 DIN rails (according to EN 50022 / IEC 60715). For example, TH 35-7.5 or TH 35-15. See **Accessories on page 18**.



MECHANICAL DRAWINGS AND ORDERING INFORMATION

TQ402 proximity transducer

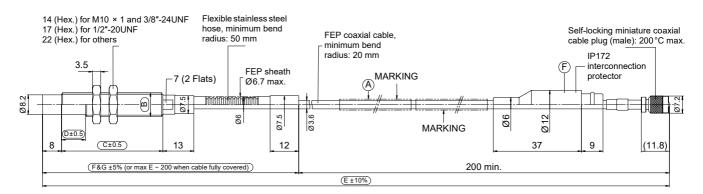

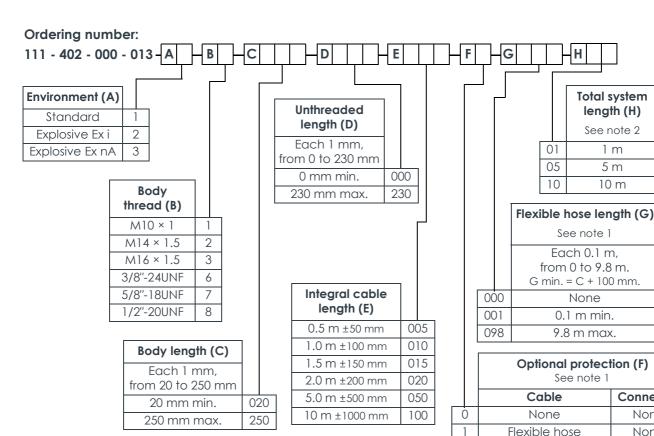

Notes

All dimensions are in mm unless otherwise stated.

- 1. When optional protection such as a flexible stainless steel hose with or without an FEP sheath is ordered: Flexible hose length (G) min. = Body length (C) + 100 mm.
 - Flexible hose length (G) max. = Integral cable length (E) 200 mm, for an integral cable that is protected to the maximum extent possible ("cable fully covered").
- 2. The Total system length (H) = TQ402 integral cable length (E) + EA402

n a

For information on cable length tolerances, see Total system length trimming on page 7.

extension cal	ole length						
For informatio	n on com	bining i	ntegral c	and extension	on cab	oles to	obtain
particular tota	al system I	enath.s	see Total	system len	ath on	page	7.

DATA SHEET

Connector

None

None

None

None

None

IP172

IP172

IP172

IP172

IP172

Flexible hose

with FEP sheath

Movable flexible hose

Movable flexible hose

with FEP sheath

None

Flexible hose

Flexible hose

with FEP sheath

Movable flexible hose

Movable flexible hose

with FEP sheath

2

3

4

5

6

7


8


9



MECHANICAL DRAWINGS AND ORDERING INFORMATION (continued)

TQ412 proximity transducer

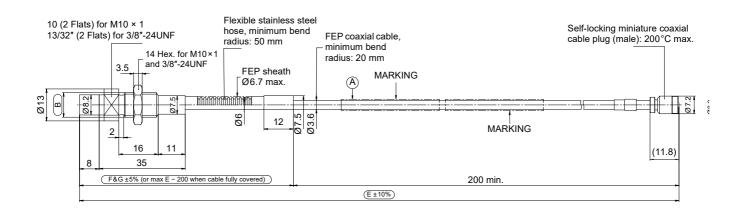

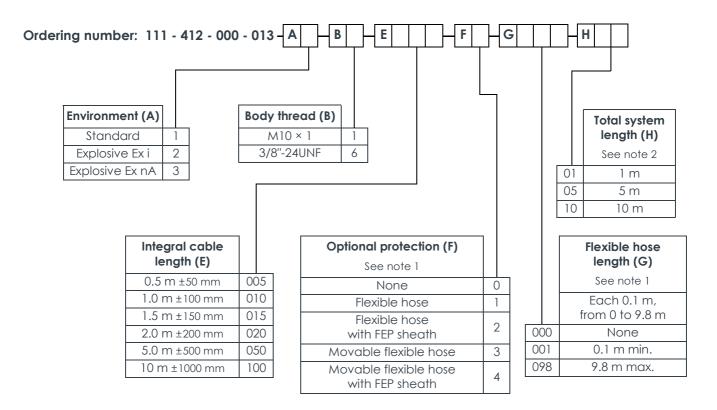

Notes

All dimensions are in mm unless otherwise stated.

- 1. When optional protection such as a flexible stainless steel hose with or without an FEP sheath is ordered: Flexible hose length (G) max. = Integral cable length (E) 200 mm, for an integral cable that is protected to the maximum extent possible ("cable fully covered").
- 2. The Total system length (H) = TQ412 integral cable length (E) + EA402 extension cable length.


 For information on combining integral and extension cables to obtain a particular total system length, see


 Total system length on page 7. For information on cable length tolerances, see Total system length trimming on page 7.



MECHANICAL DRAWINGS AND ORDERING INFORMATION (continued)

EA402 extension cable

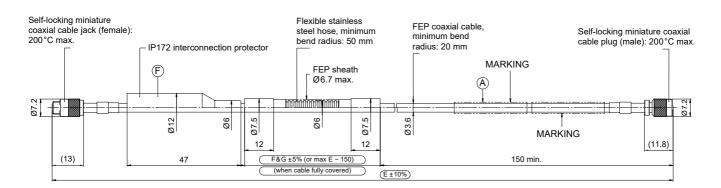

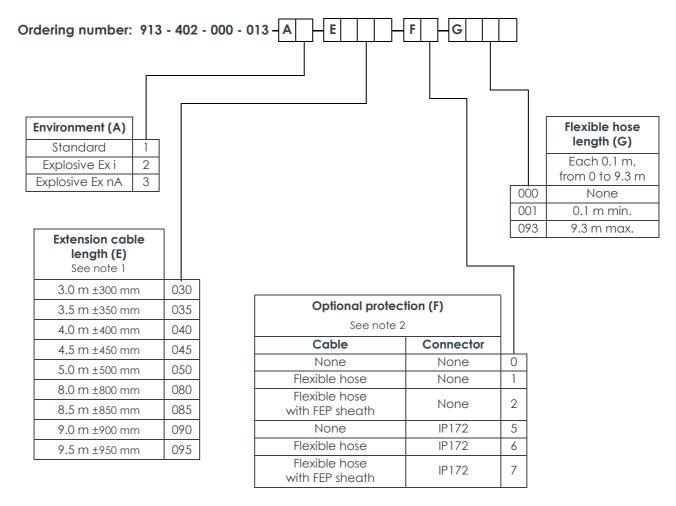

Notes


All dimensions are in mm unless otherwise stated.

- The total system length = TQ402 or TQ412 integral cable length + EA402 extension cable length (E).
 For information on combining integral and extension cables to obtain a particular total system length, see
 Total system length on page 7. For information on cable length tolerances, see Total system length trimming on page 7.
- 2. When optional protection such as a flexible stainless steel hose with or without an FEP sheath is ordered: Flexible hose length (G) max. = EA402 extension cable length (E) 150 mm, for an extension cable that is protected to the maximum extent possible ("cable fully covered").





MECHANICAL DRAWINGS AND ORDERING INFORMATION (continued)

IQS900 signal conditioner

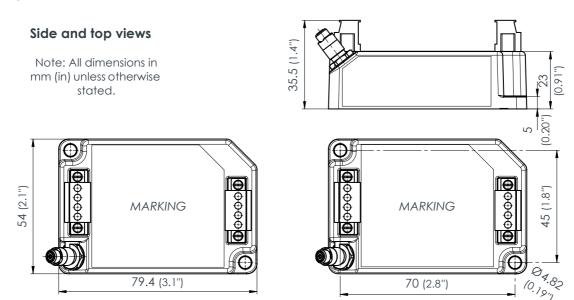

Side and end views with DIN-rail mounting adaptor (ordering option code G2)

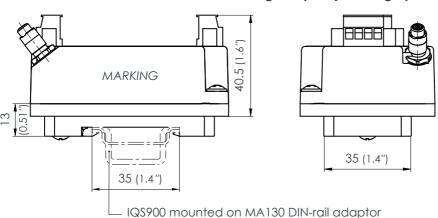

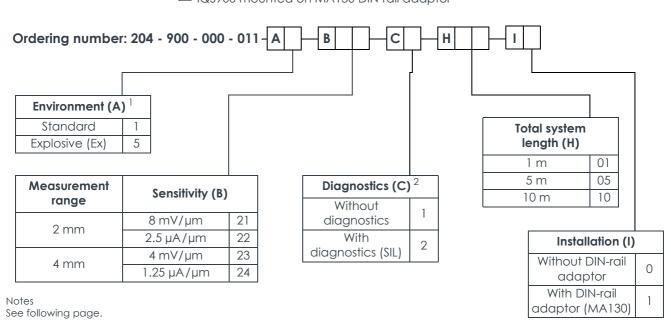

To Fly To Power To Live



MECHANICAL DRAWINGS AND ORDERING INFORMATION (continued)

IQS900 signal conditioner (continued)

Notes

- 1. Ordering option code A5 ("Ex") specifies an IQS900 signal conditioner suitable for use for use in hazardous areas.
- For an IQS900 signal conditioner with protection mode "Ex" located in an Ex Zone 2, the user must ensure that the IQS900 is installed in an industrial housing or enclosure that ensures a protection rating of at least IP54 (or equivalent).
- 2. Ordering option code **C** specifies an IQS900 signal conditioner either without diagnostics (**C1**) or with diagnostics (**C2**):
- An IQS900 signal conditioner without diagnostics (C1) is similar to the IQS45x, which it replaces. The IQS900 is a form, fit and functionally equivalent replacement that matches or betters the measurement specifications of the IQS45x.
- An IQS900 signal conditioner with diagnostics (C2) includes optional diagnostic circuitry that automatically detects and remotely indicates problems with the measurement chain (sensor, cabling and/or the IQS900 itself). An IQS900 with diagnostics is certified SIL 2 (IEC 61508) and PL c Cat 1 (ISO 13849) "by design" to more easily meet the requirements of safety-related applications. Contact Meggitt SA for further information.


ACCESSORIES

ABA17x	Industrial housings	: Refer to corresponding data sheet
IP172	Interconnection protection	: Refer to corresponding data sheet
JB118	Junction box	: Refer to corresponding data sheet
KS107	Flexible conduit (protection tube)	: Refer to corresponding data sheet
MA130	Mounting adaptor	: See below
PA15x	Probe mounting adaptors	: Refer to corresponding data sheets
SG1xx	Cable feedthroughs	: Refer to corresponding data sheets





ACCESSORIES (continued)

MA130 DIN-rail mounting adaptor

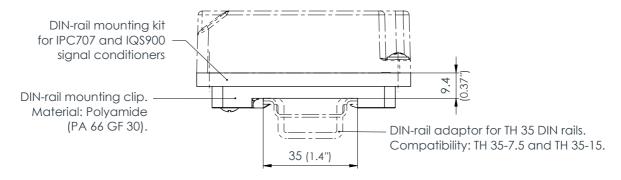

2 × self-tapping cross-head (Phillips) screws.
Type: Pan-head PT[®] screws, H drive, 4 × 10,
A2 (304) stainless steel.
Mounting torque: 0.6 N•m (0.44 lb-ft).





3 × self-tapping cross-head (Phillips) screws.
Type: Pan-head PT[®] screws, H drive, 4 × 10,
A2 (304) stainless steel.
Mounting torque: 0.6 N•m (0.44 lb-ft).

Note: All dimensions in mm (in) unless otherwise stated.

Ordering number (PNR): 809-130-000-021



RELATED PRODUCTS

TQ902/TQ912, EA902 and IQS900	Proximity measurement chains (2 or 4 mm measurement range)	: Refer to corresponding data sheet
TQ922/TQ932, EA902 and IQS900	Proximity measurement chains (2 or 4 mm measurement range, high-pressure applications)	: Refer to corresponding data sheet
TQ942, EA902 and IQS900	Proximity measurement chain (2 or 4 mm measurement range, right-angle (90°) mount sensor)	: Refer to corresponding data sheet
TQ401, EA401 and IQ\$450	Proximity measurement system (2 mm measurement range)	: Refer to corresponding data sheet
TQ403, EA403 and IQS450	Proximity measurement system (12 mm measurement range)	: Refer to corresponding data sheet
TQ422/TQ432, EA402 and IQS450	Proximity measurement system (2 or 4 mm measurement range, high-pressure applications)	: Refer to corresponding data sheet
TQ423, EA403 and IQS450	Proximity measurement system (12 mm measurement range, high-pressure applications)	: Refer to corresponding data sheet
TQ442, EA402 and IQS450	Proximity measurement system (2 or 4 mm measurement range, right-angle (90°) mount)	: Refer to corresponding data sheet
PA150	Probe mounting adaptor with proximity measurement system	: Refer to corresponding data sheet

Meggitt (Meggitt PLC) is a leading international engineering company, headquartered in England, that designs and delivers high-performance components and subsystems for aerospace, defence and selected energy markets. Meggitt comprises four customer-aligned divisions: Airframe Systems, Engine Systems, Energy & Equipment and Services & Support.

The Energy & Equipment division includes the Energy Sensing and Controls product group that specialises in sensing and monitoring solutions for a broad range of energy infrastructure, and control valves for industrial gas turbines, primarily for the Power Generation, Oil & Gas and Services markets. Energy & Equipment is headquartered in Switzerland (Meggitt SA) and incorporates the vibro-meter product line, which has over 65 years of sensor and systems expertise and is trusted by original equipment manufacturers (OEMs) globally.



All information in this document, such as descriptions, specifications, drawings, recommendations and other statements, is believed to be reliable and is stated in good faith as being approximately correct, but is not binding on Meggitt (Meggitt SA) unless expressly agreed in writing. Before acquiring and/or using this product, you must evaluate it and determine if it is suitable for your intended application. You should also check our website at www.meggittsensing.com/energy for any updates to data sheets, certificates, product drawings, user manuals, service bulletins and/or other instructions affecting the product.

Unless otherwise expressly agreed in writing with Meggitt SA, you assume all risks and liability associated with use of the product. Any recommendations and advice given without charge, whilst given in good faith, are not binding on Meggitt SA. Meggitt (Meggitt SA) takes no responsibility for any statements related to the product which are not contained in a current Meggitt SA publication, nor for any statements contained in extracts, summaries, translations or any other documents not authored and produced by Meggitt SA.

The certifications and warranties applicable to the products supplied by Meggitt SA are valid only for new products purchased directly from Meggitt SA or from an authorised distributor of Meggitt SA.

In this publication, a dot (.) is used as the decimal separator and thousands are separated by thin spaces. Example: 12345.67890. Copyright© 2022 Meggitt SA. All rights reserved. The information contained in this document is subject to change without prior notice.

Sales offices Local representative Head office

afaq

please visit our website.



Meggitt has offices in more than

30 countries. For a complete list,

Case postale
1701 Fribourg
Switzerland
Tel: +41 26 407 11 11
Fax: +41 26 407 13 01
energy@ch.meggitt.com
www.meggittsensing.com/energy

www.meggitt.com

Meggitt SA Route de Moncor 4