
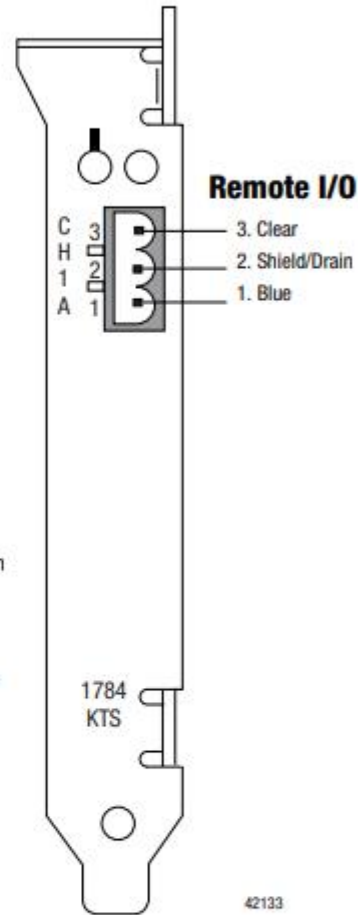


1784-KTS Connections

1784-KTXD Connections

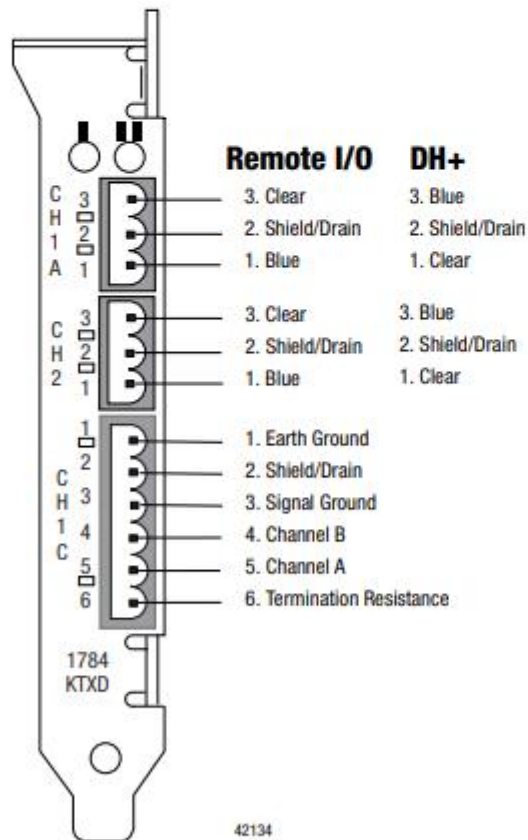

Introduction to the 1784-KTx Communication Interface Cards

Your 1784-KTx communication interface card (cat. nos. 1784-KTX, 1784-KTXD, and 1784-KTS) is an ISA half-sized card that must be inserted into a 16-bit ISA or EISA expansion slot.

Important: You *must not* place this card in an 8-bit expansion slot. Improper operation and damage to the card will result.

Table 1.A shows the 1784-KTx card features.

Table 1.A Features supported by KTx cards

KTx card catalog #:	# of channels:	Active node on these networks:	Acts as remote I/O scanner:	Supported by this Allen-Bradley software:
1784-KTX	1	DH+ or DH-485 PLC-2 and PLC-3 direct-connect ⁽¹⁾	yes	• 1784-KTx Scanner Reference Set • 6200 Series⁽³⁾ • INTERCHANGE™ • AI • RS Logix5 and RSLogix 500 via RSLinx
1784-KTXD	2	DH+ and/or DH-485 ⁽²⁾	yes	
1784-KTS	1		yes	• 1784-KTx Scanner Reference Set

⁽¹⁾ Available via 6200 Series software

⁽²⁾ Available only on channel 1

⁽³⁾ Available in version 4.5 or later