



Main

Range of product	TeSys D
Range	TeSys
Product name	TeSys D
Product or component type	Contactor
Device short name	LC1D
Contactor application	Resistive load Motor control
Utilisation category	AC-4 AC-3 AC-1
Poles description	3P
Pole contact composition	3 NO
[Ue] rated operational voltage	≤ 300 V DC for power circuit ≤ 690 V AC 25...400 Hz for power circuit
[Ie] rated operational current	25 A (≤ 60 °C) at ≤ 440 V AC AC-1 for power circuit 9 A (≤ 60 °C) at ≤ 440 V AC AC-3 for power circuit
Motor power kW	2.2 kW at 400 V AC 50/60 Hz AC-4 2.2 kW at 220...230 V AC 50/60 Hz AC-3 4 kW at 380...400 V AC 50/60 Hz AC-3 5.5 kW at 500 V AC 50/60 Hz AC-3 5.5 kW at 660...690 V AC 50/60 Hz AC-3 4 kW at 415...440 V AC 50/60 Hz AC-3
Motor power hp	1 hp at 230/240 V AC 50/60 Hz for 1 phase motors
Control circuit type	AC 50/60 Hz
[Uc] control circuit voltage	220 V AC 50/60 Hz
Auxiliary contact composition	1 NO + 1 NC
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947
Overvoltage category	III
[Ith] conventional free air thermal current	25 A at ≤ 60 °C for power circuit 10 A at ≤ 60 °C for signalling circuit
Irms rated making capacity	250 A at 440 V for power circuit conforming to IEC 60947

	140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1
Rated breaking capacity	250 A at 440 V for power circuit conforming to IEC 60947
[I _{cw}] rated short-time withstand current	105 A ≤ 40 °C 10 s power circuit 210 A ≤ 40 °C 1 s power circuit 30 A ≤ 40 °C 10 min power circuit 61 A ≤ 40 °C 1 min power circuit 100 A 1 s signalling circuit 120 A 500 ms signalling circuit 140 A 100 ms signalling circuit
Associated fuse rating	20 A gG at ≤ 690 V coordination type 2 for power circuit 25 A gG at ≤ 690 V coordination type 1 for power circuit 10 A gG for signalling circuit conforming to IEC 60947-5-1
Average impedance	2.5 mOhm at 50 Hz - I _{th} 25 A for power circuit
[U _i] rated insulation voltage	600 V for power circuit certifications CSA 600 V for power circuit certifications UL 690 V for power circuit conforming to IEC 60947-4-1 690 V for signalling circuit conforming to IEC 60947-1 600 V for signalling circuit certifications CSA 600 V for signalling circuit certifications UL
Electrical durability	0.6 Mcycles 25 A AC-1 at U _e ≤ 440 V 2 Mcycles 9 A AC-3 at U _e ≤ 440 V
Power dissipation per pole	0.2 W AC-3 1.56 W AC-1
Protective cover	With
Mounting support	Rail Plate
Standards	CSA C22.2 No 14 EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1 UL 508
Product certifications	CSA GL LROS (Lloyds register of shipping) BV RINA GOST DNV CCC UL
Connections - terminals	Control circuit : screw clamp terminals 2 cable(s) 1...2.5 mm ² - cable stiffness: flexible - with cable end Power circuit : screw clamp terminals 1 cable(s) 1...4 mm ² - cable stiffness: flexible - with cable end Control circuit : screw clamp terminals 1 cable(s) 1...4 mm ² - cable stiffness: flexible - without cable end Control circuit : screw clamp terminals 2 cable(s) 1...4 mm ² - cable stiffness: flexible - without cable end Control circuit : screw clamp terminals 1 cable(s) 1...4 mm ² - cable stiffness: flexible - with cable end Control circuit : screw clamp terminals 1 cable(s) 1...4 mm ² - cable stiffness: solid - without cable end Control circuit : screw clamp terminals 2 cable(s) 1...4 mm ² - cable stiffness: solid - without cable end Power circuit : screw clamp terminals 1 cable(s) 1...4 mm ² - cable stiffness: flexible - without cable end Power circuit : screw clamp terminals 2 cable(s) 1...4 mm ² - cable stiffness: flexible - without cable end Power circuit : screw clamp terminals 2 cable(s) 1...2.5 mm ² - cable stiffness: flexible - with cable end Power circuit : screw clamp terminals 1 cable(s) 1...4 mm ² - cable stiffness: solid - without cable end Power circuit : screw clamp terminals 2 cable(s) 1...4 mm ² - cable stiffness: solid - without cable end
Tightening torque	Power circuit : 1.7 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm Power circuit : 1.7 N.m - on screw clamp terminals - with screwdriver Philips No 2 Control circuit : 1.7 N.m - on screw clamp terminals - with screwdriver flat Ø 6 mm Control circuit : 1.7 N.m - on screw clamp terminals - with screwdriver Philips No 2
Operating time	4...19 ms opening 12...22 ms closing
Safety reliability level	B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1
Mechanical durability	15 Mcycles

Operating rate	3600 cyc/h at $\leq 60\text{ }^{\circ}\text{C}$
----------------	---


Complementary

Coil technology	Without built-in suppressor module
Control circuit voltage limits	0.3...0.6 U_c drop-out at $60\text{ }^{\circ}\text{C}$, AC 50/60 Hz 0.8...1.1 U_c operational at $60\text{ }^{\circ}\text{C}$, AC 50 Hz 0.85...1.1 U_c operational at $60\text{ }^{\circ}\text{C}$, AC 60 Hz
Inrush power in VA	70 VA at $20\text{ }^{\circ}\text{C}$ ($\cos \phi$ 0.75) 60 Hz 70 VA at $20\text{ }^{\circ}\text{C}$ ($\cos \phi$ 0.75) 50 Hz
Hold-in power consumption in VA	7.5 VA at $20\text{ }^{\circ}\text{C}$ ($\cos \phi$ 0.3) 60 Hz 7 VA at $20\text{ }^{\circ}\text{C}$ ($\cos \phi$ 0.3) 50 Hz
Heat dissipation	2...3 W at 50/60 Hz
Auxiliary contacts type	Type mechanically linked (1 NO + 1 NC) conforming to IEC 60947-5-1 Type mirror contact (1 NC) conforming to IEC 60947-4-1
Signalling circuit frequency	25...400 Hz
Minimum switching current	5 mA for signalling circuit
Minimum switching voltage	17 V for signalling circuit
Non-overlap time	1.5 ms on energisation between NC and NO contact 1.5 ms on de-energisation between NC and NO contact
Insulation resistance	$> 10\text{ MOhm}$ for signalling circuit
Power range	1.1...2 kW 200...240 V 3 phases 2.2...3 kW 380...440 V 3 phases 4...6 kW 380...440 V 3 phases 4...6 kW 480...500 V 3 phases
Motor starter type	Direct on-line contactor
Contactor coil voltage	220 V AC standard

Environment

Protective treatment	TH conforming to IEC 60068-2-30
Pollution degree	3
Ambient air temperature for operation	$-5\text{...}60\text{ }^{\circ}\text{C}$
Ambient air temperature for storage	$-60\text{...}80\text{ }^{\circ}\text{C}$
Permissible ambient air temperature around the device	$-40\text{...}70\text{ }^{\circ}\text{C}$ at U_c
Operating altitude	3000 m without derating in temperature
Fire resistance	$850\text{ }^{\circ}\text{C}$ conforming to IEC 60695-2-1
Flame retardance	V1 conforming to UL 94
Mechanical robustness	Vibrations contactor open 2 Gn, 5...300 Hz Vibrations contactor closed 4 Gn, 5...300 Hz Shocks contactor open 10 Gn for 11 ms Shocks contactor closed 15 Gn for 11 ms
Height	77 mm
Width	45 mm
Depth	86 mm
Product weight	0.32 kg


Dimensions

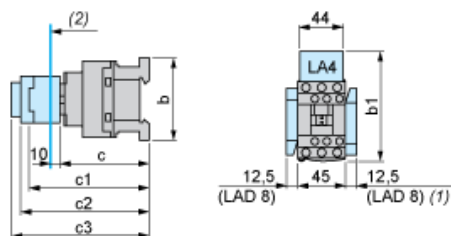

- (1) Including LAD 4BB
(2) Minimum electrical clearance

LC1		D09...D18	D093...D123	D099...D129
b	without add-on blocks	77	99	80
b1	with LAD 4BB	94	107	95.5
with LA4 D F10 ⁽¹⁾		123 ⁽¹⁾	111.5 ⁽¹⁾	
with LA4 D F14 ⁽¹⁾		132 ⁽¹⁾	120.5 ⁽¹⁾	
with LA4 D W12 ⁽¹⁾		139 ⁽¹⁾	127.5 ⁽¹⁾	
c	without cover or add-on blocks	84	84	84
c	with cover, without add-on blocks	86	86	
c1	with LAD N or C (2 or 4 contacts)	117	117	117
c2	with LA6 DK10, LAD 6K10	129	129	129
c3	with LAD T, R, S	137	137	137
	with LAD T, R, S and sealing cover	141	141	
(1)	Including LAD 4BB.			

Wiring



Our Proposal - Type 1 : Circuit Breaker + Contactor for Motor Power from 0,06 to 4 kW and 415 VAC

Motor power (kW)	ICU (kA)	Breaker	Contactor (*)
0.06	> 100	GV2ME02	LC1D09M7
0.09	> 100	GV2ME03	LC1D09M7
0,12 to 0,18	> 100	GV2ME04	LC1D09M7
0,25 to 0,37	> 100	GV2ME05	LC1D09M7
0.55	> 100	GV2ME06	LC1D09M7
0.75	> 100	GV2ME07	LC1D09M7
1,1 to 1,5	> 100	GV2ME08	LC1D09M7
2.2	> 100	GV2ME10	LC1D09M7
3 to 4	> 100	GV2ME14	LC1D09M7